

*Aapke kadmon ko chahiye  
kuch naya...*

 **RAMCO**<sup>®</sup><sup>©</sup>  
VITRIFIED TILES

 **RAMCO**<sup>®</sup><sup>©</sup>  
VITRIFIED TILES

**RAMOJI GRANITE PVT LTD.**

8-A, National Highway, Matel Road, At. Sartanpar,  
Dhuva-363 621, Tal.: Wankaner, Dist.: Morbi (Guj.) INDIA.  
Ph.: +91-2828-287611-22 Fax : +91-2828-287644  
Mo. +91 99093 43743, 98252 57500, 98798 73757  
e-mail : ramojigranite@gmail.com web. : www.ramojigranite.com

SIGNATURE : +91 85110 85183

**800X800mm & 600X600mm**

## Company Profile

Since 1999,"RAMCO" is an established brand for the dealers , builders and to those people associated to construction industry.Plant is fully equipped with the latest technology and managed by the highly qualified professionals for manufacturing the best quality of vitrified tiles with a huge capacity of production and wide range of quality products. Today RAMCO is leading in its production range.

With a strong belief in quality,quality control begins with the procurement of raw material, testing in INHOUSE lab which are equipped with latest equipments for the process of manufacturing in a state of art plant and testing of the product after each process till the packaging of the material to give 100% satisfaction to end users. The ultimate goal is simple "CUSTOMER'S SATISFACTION".

RAMCO strongly believe in TEAM WORK, right from the production to marketing with a globally dealing network which is a part of it. Our nationwide marketing team works with the feeling of togetherness (integrity) with our dealers to give complete satisfaction to the users. We strongly believe in growth by growth for our channel partners, production team, marketing team and people associated with us.

Coming  
**Soon**  
**Big Slabs**

## Index

Matrix Series	2
Palatial Series	3-5
Galaxy Series	6-7
Pulati Series	8-9
Barrosa Series	10-11
White Series	12-16
Special Color	16
600X 600mm	




Matrix White



Matrix Gold




*Design In Display :Matrix Silver*

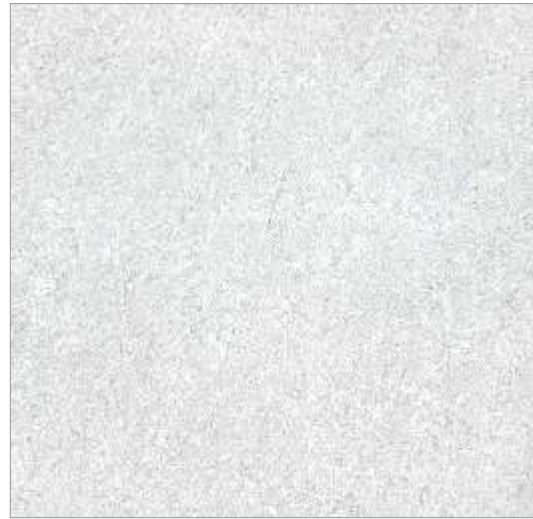

Matrix Silver



Matrix Rosa

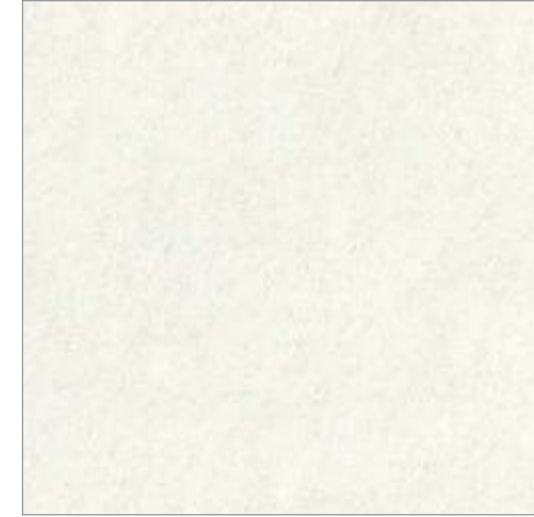

Tropicana White



Garito



Pearl Pink



Pista



Solid Gold



Black



Red




Silk Brown



Green



Almond

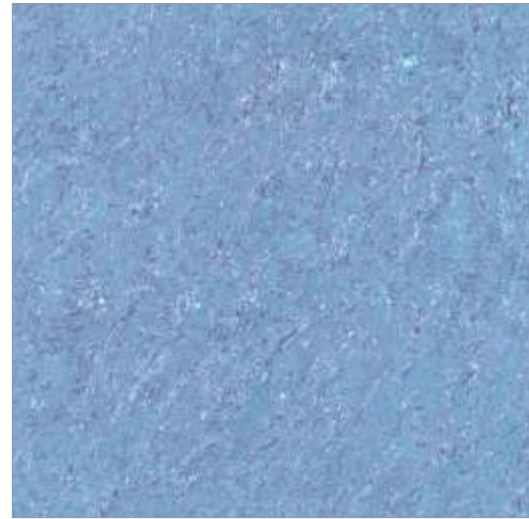

Ocean Blue



Design In Display : Almond



Galaxy Slate



Galaxy Black



*Design In Display : Galaxy Slate*




Galaxy Brown




Galaxy Red




*Design In Display : Galaxy Red*

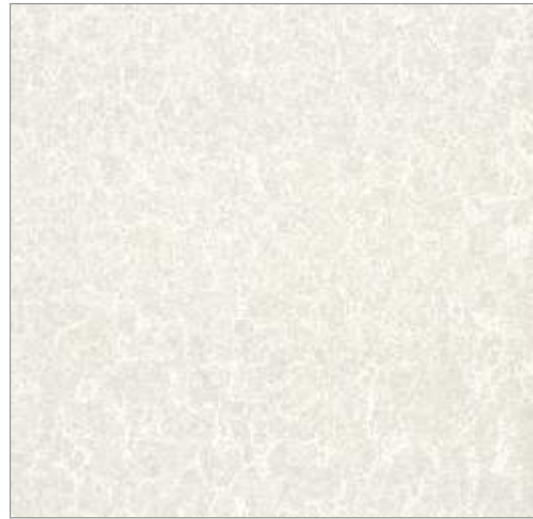

Pulati White

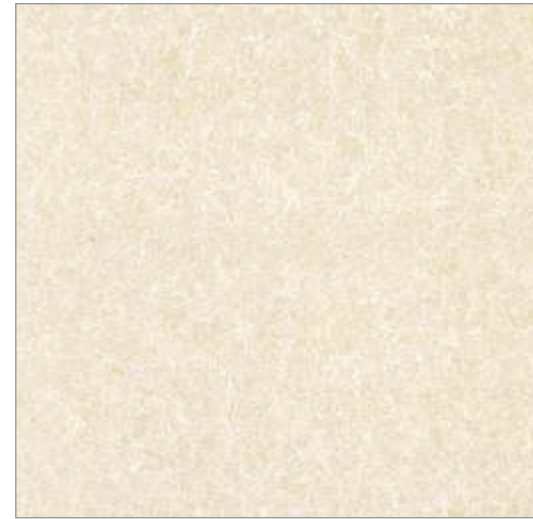


Pulati Gold

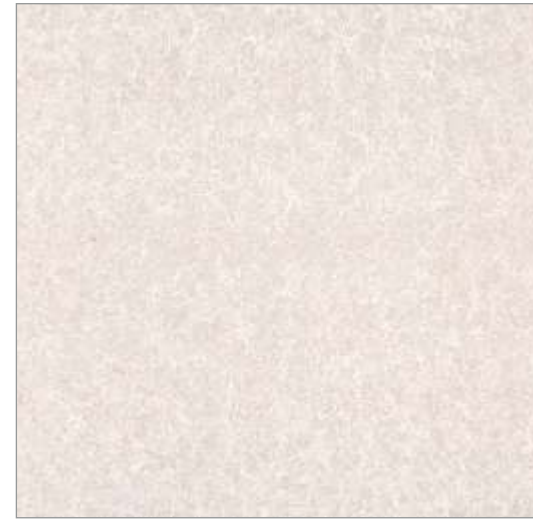

Pulati Pink



Pulati Black

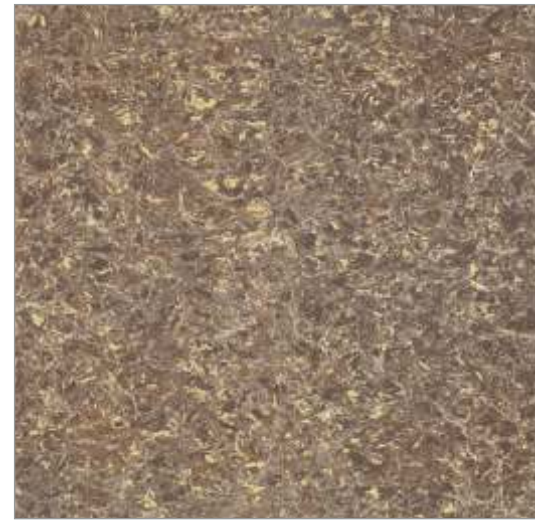

Pulati Brown



Design In Display : Pulati Gold



Barrosa White




Barrosa Gold



Barrosa Pink



Barrosa Black

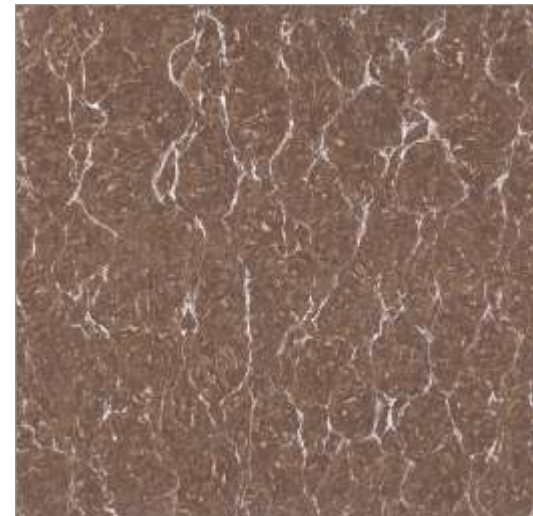


Barrosa Brown



Barrosa Red



Design In Display : Barrosa White



Snow White




Eva White



*Design In Display : Eva White*



Ocean White

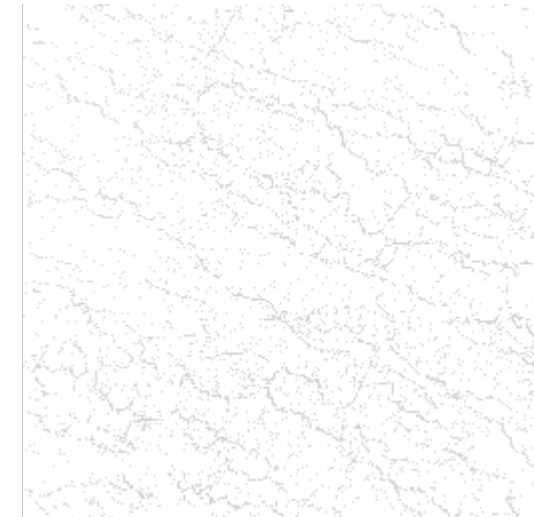

Perth White



Piper White



Pizara White



Nova White





Rose



Jupiter White



Smoke White



Aspen Blue



Royal White



Victoria White



Omni White



Zenith White




Emerald White



Camroon White



Jaisalmer



Terra Cotta



Design In Display : Jaisalmer , Terra Cotta

## TECHNICAL SPECIFICATION

CHARACTERISTIC			
DIMENTION & SURFACE QUALITY	International Specification Iso 13006/En 176 Group & IS 15622:2006	RAMCO VALUE	METHOD OF TESTING
Deviation in length	± 0.6%	± 0.1%	ISO 10545 Pt 2
Deviation in thickness	± 5%	± 3%	ISO 10545 Pt 2
Straightness of sides	± 0.5%	± 0.1%	ISO 10545 Pt 2
**Rectangularity	± 0.6%	± 0.2%	ISO 10545 Pt 2
**Surface Flatness	± 0.5%	± 0.2%	ISO 10545 Pt 2
Glossiness	-	Min 80% Reflection	Glossmeter
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	<0.5%	<0.05%	ISO 10545 Pt 3
Mohs Hardness	>6	8	EN 101
Flexural Strength	35 N/mm <sup>2</sup>	>40 N/mm <sup>2</sup>	ISO 10545 Pt 4
Abrasion Resistance**	<175mm <sup>3</sup>	<144mm <sup>3</sup>	ISO 10545 Pt 6
**Skid Resistance	>0.4	>0.4	ISO 10545 Pt 17
Breaking Strength**	1113 N	2800 N	ISO 10545 Pt 4
Density (g/cc)	>2.0	>2.4	ISO 10545 Pt 3
Frost Resistance	Frost Proof	Frost Proof	ISO 10545 Pt 9
Thermal Shock Resistance	No Damage	No Damage	ISO 10545 Pt 9
Thermal Expansion	<9x10 <sup>-6</sup>	<6x10 <sup>-6</sup>	ISO 10545 Pt 8
Moisture Expansion	Nil	Nil	ISO 10545 Pt 10
CHEMICAL PROPERTIES			
Chemical Resistance	No Damage	No Damage	ISO 10545 Pt 13
Colour Resistance	No Damage	No Damage	DIN 51094
Stain Resistance	Resistant	Resistant	ISO 10545 Pt 14

• Mohs Hardness Excluded from the standards.  
•• These parameters are not applicable for structured punches tiles

### Packing Details

Size	No. of Tiles Per Box	Coverage Area (Approx)	Weight Per Box (Approx)
800X800	3	1.92 sq.mtr.	43 kg
600X600	4	1.44 sq.mtr.	28 kg

How to avoid defects & complaints :

- Use Good Quality Tiles
- “Choose good quality Tiles”. with proper consideration to area intended of usage.
- Avoid careless laying of Tiles
- Avoid Poor maintenance - for instance, by cleaning with strong Chemicals or with abrasive equipment e.g. metallic scrubber
- Always keep tiled area clean & ensure dusting/mopping regularly
- Put doormats/Foot-mats at all Strategic locations to avoid loose debris/dust from entering the Tiled area

Notes:

- All Technical Specification in this Catalogue Are For Premium Grade Material Only.
- **SHADE/SIZE VARIATION** are inherent characteristics to ceramics. Certain products purposely have variations which are part of design & process. The same have been indicated.
- It is recommended To Blend Tiles By Mixing Tiles From Various Boxes & Check For Nature Hue Before Fixing The Tiles.
- It is recommended to check the tiles before laying/fixing. quality standards cover only Premium Quality only.
- Company’s liability is limited on material that has not been laid.
- **NO COMPLAINT SHALL BE ENTERTAINED ON FIXED/LAID.**
- The liability is also limited to the material supplied by the company no other claim is entertained under any circumstances.

**GENERAL NOTE :** Any Complaint must be Brought To The Company’s Notice Within 10 days of Purchase & Before Fixing of Tiles.

Colours Shown are as accurate as the printing process will allow. Every effort has been made to ensure the accuracy of the information given. The company reserves the right to change the specifications without prior notice. Variations in shade or size being inherent to ceramic industry may occur.

### Utility Of Floor Tiles

